## **ELEVATION CERTIFICATE**

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

14936 15 Ave 53

O.M.B. No 3067-0077 Expires May 31, 1993

TENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to jovide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

	SECTION A PR		DMATION		· · · · · · · · · · · · · · · · · · ·
BUILDING OWNER'S NAME		FOR INSURANCE COMPANY USE POLICY NUMBER			
HERITAG	POLICT NUMBER				
STREET ADDRESS (Including Ap		COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and E	Block Numbers, etc.)	•	•	ANOS	VOL 55 Py 131 138
MONRO!	E SNO	401118	SH CO.	STATE	zip code 982-72
· · · · · · · · · · · · · · · · · · ·	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	INFORMATION	
Provide the following from the	ne proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
530169	0001	8	3/15/84	A5	(in AO Zones, use depth)
7. Indicate the elevation date 8. For Zones A or V, where the community's BFE:	no BFE is provided o	n the FIRM, an	nd the community has esta	ablished a BFE fo	Other (describe on back) r this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	TATION	
<ul><li>(c). FIRM Zone A (without below (check one)</li><li>(d). FIRM Zone AO. The flone) the highest grade</li></ul>	BFE). The floor used the highest grade ac oor used as the refer adjacent to the build	d as the referent jacent to the brence level fron ing. If no flood	uilding.	diagram is LL LL leet ab e, is the building's	ove or below (check
<ol> <li>Indicate the elevation date under Comments on Page the FIRM [see Section E equation under Commental 4. Elevation reference mark</li> </ol>	e 2). (NOTE: If the 6 3, Item 7], then conve s on Page 2.)	elevation datum rt the elevation	n used in measuring the e ns to the datum system us	levations is difference sed on the FIRM a	ent than that used on
5. The reference level eleva (NOTE: Use of construct case this certificate will on will be required once cons	tion is based on: 📈 ion drawings is only v ly be valid for the bui	actual constru valid if the build ilding during the	ction  construction dr	awings ereference level fl	loor in place, in which
6. The elevation of the lower Section B, Item 7).	st grade immediately	adjacent to the	e building is: 432.	.¶_ feet NGVD (d	or other FIRM datum-see
	SE	CTION D CO	MMUNITY INFORMATIO	- N	
If the community official re is not the "lowest floor" as floor" as defined by the or 2. Date of the start of constr	defined in the communication distribution defined in the communication def	nunity's floodpla	rations specifies that the rain management ordinance	e, the elevation o	

## SECTION C BUILDING ELEVATION INFORMATION

## VERTICAL DATUM = N.G.V.D. 1929

ORIGINAL BENCH MARK: P.T.S. 5 (U.S.G.S.) —— AT MONROE, SNOHOMISH COUNTY, AT THE
WEST END OF TOWN, ON THE CENTER LINE OF MAIN STREET, 6-1/2
FEET SOUTH OF THE NORTH CURB OF THE CENTER PARKING SPACE,
AND 6 FEET EAST OF A FLAG POLE. A UNITED STATES GEOLOGICAL
SURVEY STANDARD TRAVERSE—STATION CAP, STAMPED "PRIM TRAV
STA 5 68" AND RIVITED ON THE TOP OF A 3-1/2 INCH IRON PIPE.
ELEVATION: 67.28 FEET

4.) Based on project benchmark #6 (elevation 32.19!) as shown on sheet 2 of 7, Fryelands Division 2 Datum reference in NGVD 1929.


## SECTION E CERTIFICATION

his ification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation for on when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. ommunity officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the ertification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an wner's representative may also sign the certification.

eference level diagrams 6, 7 and 8 - Distinguishing Features—If the certifier is unable to certify to breakaway/non-breakaway wall, nolosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not cluded in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available, understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

_184_	<u>H. C</u>	00m15	> 1.	Fo	28919			
ERTIFIER'S NAME	i	-		, LI	CENSE NUMBER (or A	Affix Seal)		
Kojac	E	JGIHER			d A=	5000+	2.5	
TLE U	) }	1 46	~ i °	OMPANY NAME	· · · · · ·		_	
1415/	ME	128-	<u> 5t.</u>	Kır	kland		7	98034
DØRESS /			(	CITY			STATE	ZIP
4/1/					12-2-93	(206)	821-	8448
GNATURE					DATE	PHONE		
OMMENTS:			, 55111110	y omolat, a	2) insurance ager		- Juliu	mg owner.
<u> </u>								***************************************
	<del></del>							
	<u></u>							

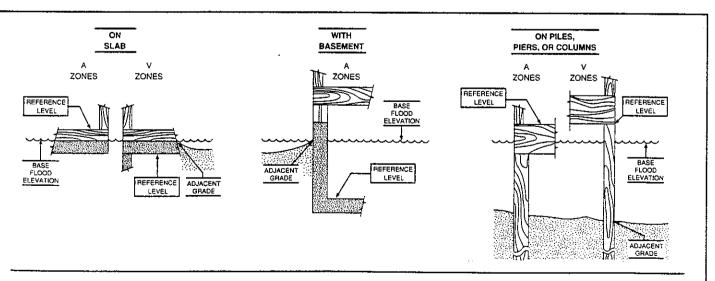

diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.